



Cushion

Modular rubber anti-fatigue mats with holes for excellent drainage and aeration leaving a dry, clean work area. These interlocking mats allow on-site customization. Square snap-together units of 91 cm x 91 cm that can be assembled effortlessly and laid out from wall to wall or as islands in any direction or shape.

Compatible with patented MD Ramp System™ for smart safety bevelling solutions; allow out and inside corners.

Superb anti-fatigue properties due to its unique design underneath and high quality resilient rubber compounds. Designed to yield a long service life. Resistant to most chemicals and extreme temperatures. Free of silicone therefore safe for vehicle painting facilities. Ergonomic benefit derived from 19 mm thick worker platform.

Recommended uses:

- Heavy duty - wet areas

Specifications:

- Heavy duty rubber compound.
- Overall thickness: 19 mm.
- Weight: 10.8 kg per mat.
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals.

Colours:


- Black

Stock sizes:

- 91 cm x 91 cm

Accessories:

- MD Ramp System™ Nitrile male and female attachable bevels 91 cm, black or yellow

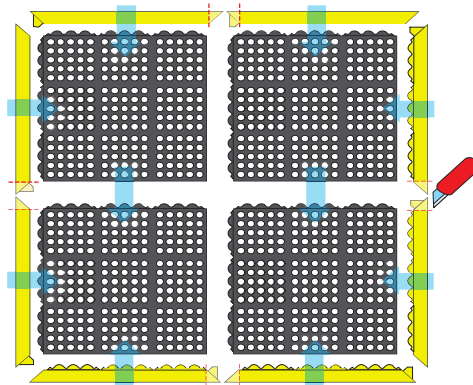

Control Handwheels

Clamping Handles

Rotary Controls

Levelling Elements

Indexing Elements

Level Indicators

Magnets

Joints

Gas Spring

Cylindrical Bellows

Telescopic Slides

Machine Elements

Control Handwheels

Clamping Handles

Rotary Controls

Levelling Elements

Indexing Elements

Level Indicators

Magnets

Joints

Gas Spring

Cylindrical Bellows

Telescopic Slides

Machine Elements





Heavy Duty Modular Rubber Mats - Wet/Dry Areas

Control Handwheels
Clamping Handles
Rotary Controls
Levelling Elements
Indexing Elements
Level Indicators
Magnets
Joints
Gas Spring
Cylindrical Bellows
Telescopic Slides
Machine Elements



PA6550-000

Specifications:

- 100% natural rubber compound
- General purpose applications



PRODUCT TESTING



PA6650S-000 (Nitrile)

Specifications:

- 100% nitrile rubber compound
- Resistant to most industrial oils



PRODUCT TESTING




PA6650SFR-000 (FR)

Specifications:

- 100% nitrile rubber compound
- Fire classification Bfl-S1 tested according to EN 13501-1
- Resistant to most industrial oils and suitable for welding areas



PRODUCT TESTING

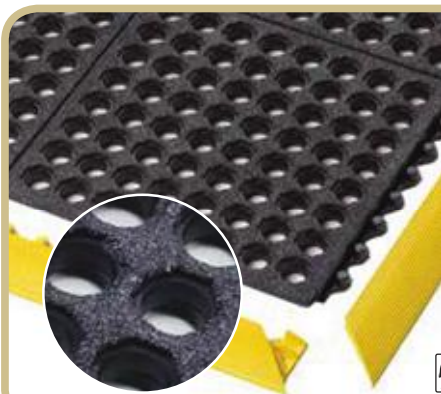

PA6850SFR-000 (FR GSII)

Specifications:

- 100% nitrile rubber compound
- With abrasive Grip Step coating for extra adherence in extremely slippery areas
- Slip resistance R13 according to DIN 51130
- Fire classification Bfl-S1 tested according to EN 13501-1
- Resistant to most industrial oils and suitable for welding areas



PRODUCT TESTING

