



Anti-slip Solutions - Wet Areas





PA6537-000

Industrial grade welded duckboard design that creates an elevated platform for safety and offers basic fatigue relief. Open grid mat construction provides excellent drainage of fluids in all directions. The anti-slip base and anti-slip surface create a healthier and safer environment in wet or oily areas. The PVC vinyl compound resists chemicals, oil and grease. Easy to install and relocate. Easy to clean and requires little to no maintenance. Suitable for heavy duty use and will not flatten over time.

Specifications:

- Industrial grade extruded PVC compound in a welded grid design
- Oil and grease resistant
- Overall thickness: 12 mm
- Weight: 7.5 kg per m
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals
- Slip resistance R10 tested according to DIN51130 and BG-rule BGR181

Recommended uses:

- Heavy duty - wet, dry or oily industrial areas

Colours:

- Black, Black/yellow

Full rolls 10m:


- 60 cm, 91 cm and 122 cm wide

Custom lengths:

- 60 cm, 91 cm and 122 cm widths per linear meter

Accessories

- Connector clips available for width-wise lengthwise expansion
- 90-degree connections

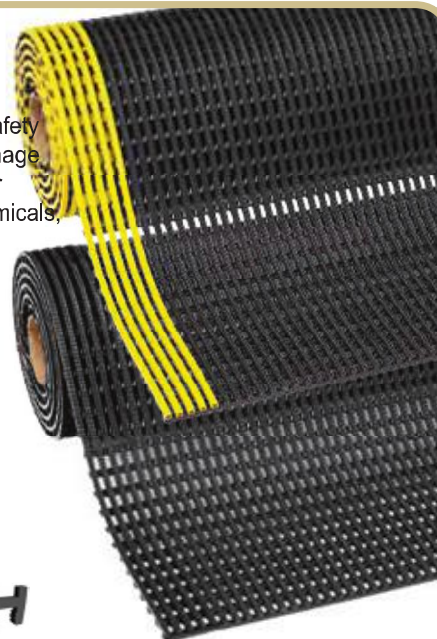

PRODUCT TESTING



PA6539-000

Multi-functional anti-slip matting can be used for many applications.

The wave design creates a slip-resistant surface that increases traction on wet and slippery floors. Anti-bacterially treated vinyl prevents growth of fungi or bacteria. Open structure for easy draining where dependable sure footing is essential.

Easy to clean and requires only minimal maintenance.

Specifications:

- Industrial grade extruded PVC in a wave design, anti-bacterially treated
- Overall thickness: 11 mm
- Oil and grease resistant
- Weight: 8 kg per m
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals
- Slip resistance R10 tested according to DIN51130 and BG-rule BGR181

Recommended uses:

- Heavy duty - wet, dry or oily industrial areas

Colours:

- Grey

Full rolls 12.2m:

- 91 cm and 122 cm wide


Custom lengths:

- 91 cm and 122 cm widths per linear meter



PRODUCT TESTING



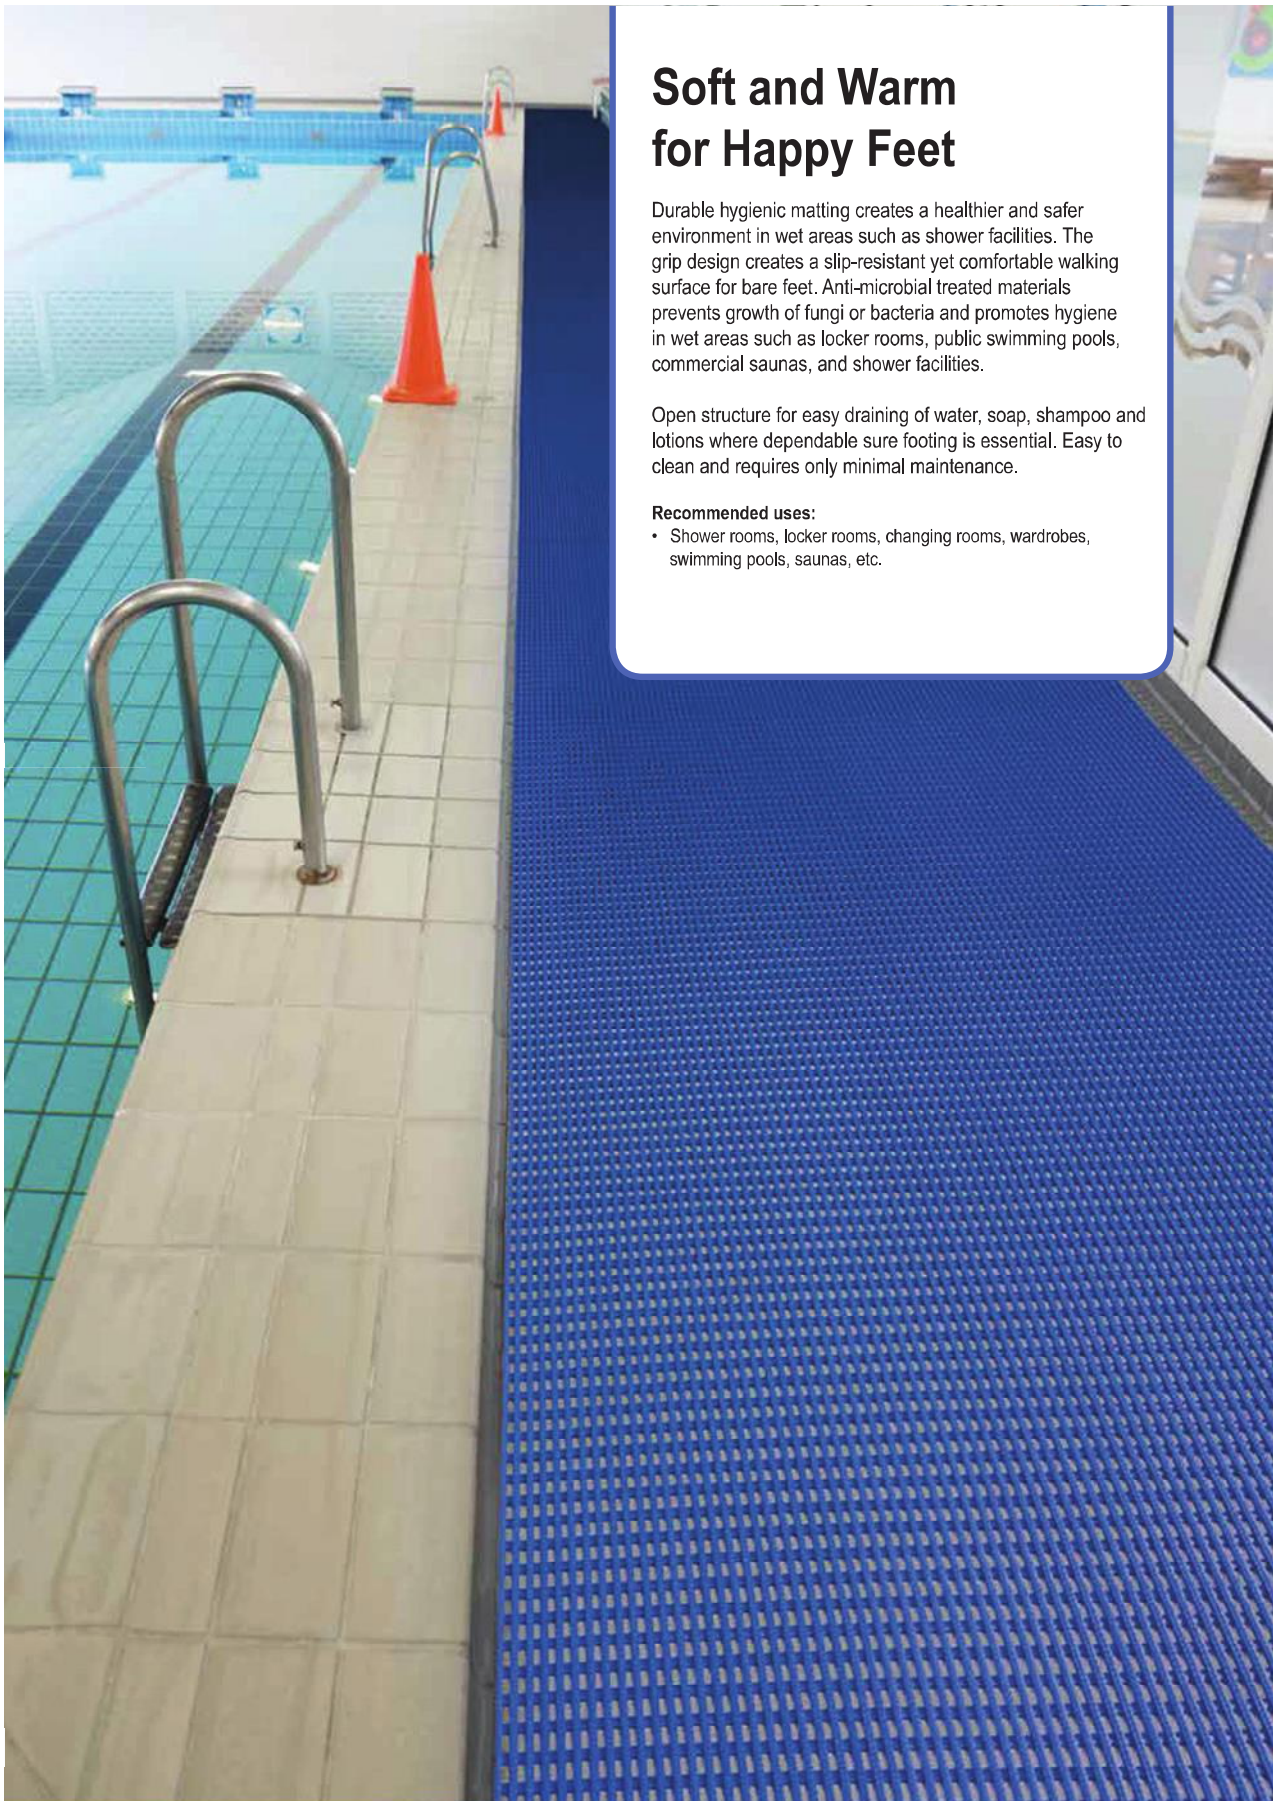

Soft and Warm for Happy Feet

Durable hygienic matting creates a healthier and safer environment in wet areas such as shower facilities. The grip design creates a slip-resistant yet comfortable walking surface for bare feet. Anti-microbial treated materials prevents growth of fungi or bacteria and promotes hygiene in wet areas such as locker rooms, public swimming pools, commercial saunas, and shower facilities.

Open structure for easy draining of water, soap, shampoo and lotions where dependable sure footing is essential. Easy to clean and requires only minimal maintenance.

Recommended uses:

- Shower rooms, locker rooms, changing rooms, wardrobes, swimming pools, saunas, etc.





Control
Handwheels

Clamping
Handles

Rotary
Controls

Levelling
Elements

Indexing
Elements

Level
Indicators

Magnets

Joints

Gas
Spring

Cylindrical
Bellows

Telescopic
Slides

Machine
Elements

Control
Handwheels

Clamping
Handles

Rotary
Controls

Levelling
Elements

Indexing
Elements

Level
Indicators

Magnets


Joints

Gas
Spring

Cylindrical
Bellows

Telescopic
Slides

Machine
Elements

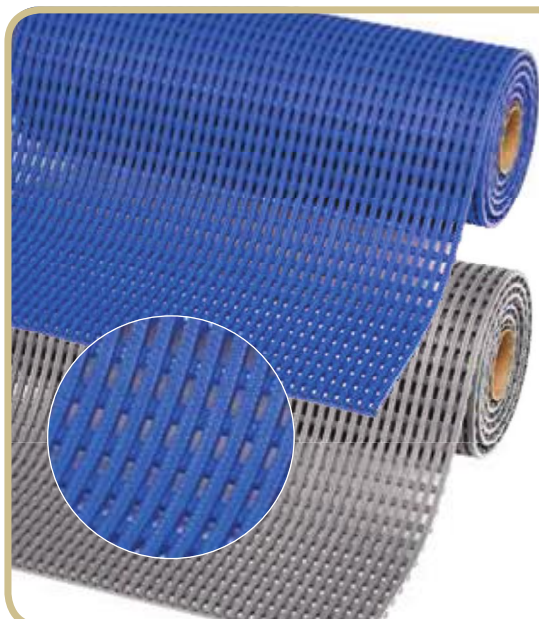

PA6536-000

- Heavy duty UV resistant antibacterial PVC grid matting
- Overall thickness: 12 mm
- Weight: 7.5 kg per m
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals

Colours:

- Blue, Grey

Accessories

- Black connector clips available for width-wise/lengthwise expansion 90-degree connections




Full rolls 10 m:

- 60 cm, 91 cm and 122 cm wide

Custom lengths:

- 60 cm, 91 cm and 122 cm widths per linear meter

PRODUCT TESTING

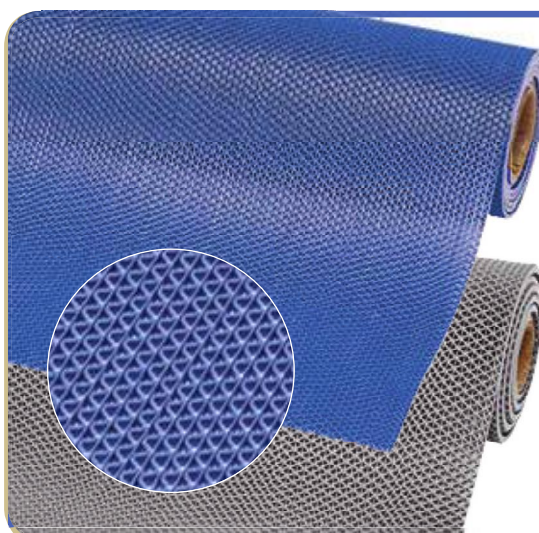

PA6538-000

- Light duty UV resistant antibacterial PVC wave matting
- Overall thickness: 5.3 mm
- Weight: 3.6 kg per m
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals

Colours:

- Blue, Grey

Custom lengths:

- 91 cm and 122 cm widths per linear meter

Full rolls 12,2 m:

- 91 cm and 122 cm wide

PRODUCT TESTING



PA6535-000 (Soft)


- Light duty UV resistant antibacterial polyethylene wave matting
- Overall thickness: 9 mm
- Weight: 4.3 kg per m

Colours:

- White-Dotted, Beige, Blue

Accessories:

- Connector clips available for width-wise expansion



Full rolls 15 m:

- 60 cm wide

Custom lengths:

- 60 cm widths per linear meter

PRODUCT TESTING

