

332



| MODEL NO | PASLANMAZ (STAINLESS) | SİYAH (BLACK) | F1 (N) | F3 (N) | STROK (DİŞ BOYU) (STROKE) (thread length) | AĞIRLIK (WEIGHT) (gr) |
|----------|-----------------------|---------------|--------|--------|-------------------------------------------|-----------------------|
| 332 - 1  | S 332 - ....          | B 332 - ....  | 1000   | 1500   | 45                                        | 95                    |
| 332 - 2  | S 332 - ....          | B 332 - ....  | 1500   | 2000   | 45                                        | 160                   |
| 332 - 3  | S 332 - ....          | B 332 - ....  | 2200   | 3200   | 75                                        | 310                   |
| 332 - 4  | S 332 - ....          | B 332 - ....  | 7000   | 8000   | 95                                        | 720                   |
| 332 - 5  |                       | B 332 - ....  | 10000  | 11000  | 110                                       | 860                   |

F1 : BASKI KUVVETİ ( EXERTING FORCE ) , F3 : TUTMA KAPASİTESİ ( HOLDING CAPACITY )  
Paslanmaz U Kancalı ürünlerin çekme kuvvetleri %30 daha azdır. ( Stainless stell latch clamp's tensile strength are %30 more less )



**Ayak Tipi: Dikey Tabanlı**  
Body Mounting Base: Vertical



311

Sayfa/Page: 36






331

Sayfa/Page: 38




351


Sayfa/Page: 42

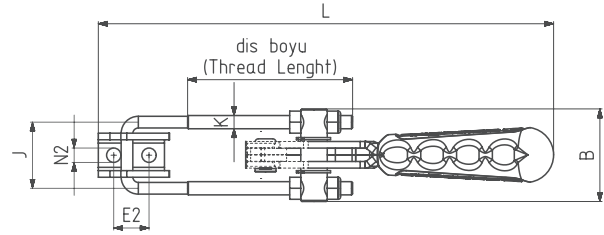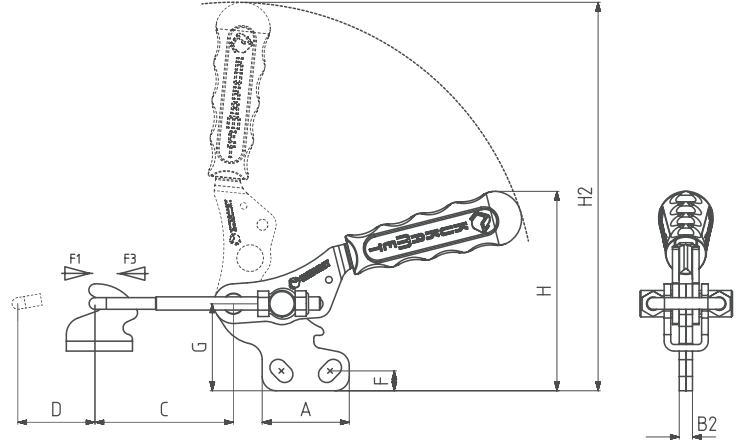


MODEL NO : 332-1



MODEL NO : 332-2



MODEL NO : 332-3



MODEL NO : 332-4-5



| MODEL NO | A    | B  | B2 | C min. | C max. | D  | E ~     | E2 ~    | F ~        | G    | H   | H2   | J  | K   | L min. | L max. | M     | N          | N2        |
|----------|------|----|----|--------|--------|----|---------|---------|------------|------|-----|------|----|-----|--------|--------|-------|------------|-----------|
| 332 - 1  | 26   | 33 | 5  | 35     | 65     | 20 | 16      | 10      | 5          | 25   | 40  | 91,5 | 23 | M4  | 135    | 165    |       | Ø 5        | Ø 5       |
| 332 - 2  | 28   | 33 | 5  | 32     | 62     | 25 | 13 - 15 | 10 - 14 | 6 - 9      | 31   | 72  | 134  | 23 | M4  | 142    | 172    |       | 6 x 9      | 5,5 x 7,5 |
| 332 - 3  | 39,5 | 42 | 6  | 32     | 67     | 35 | 19 - 25 | 16      | 7,5 - 10,5 | 39,5 | 85  | 178  | 30 | M 6 | 177    | 212    |       | 7,5 x 11,5 | Ø 6,5     |
| 332 - 4  | 58   | 60 | 8  | 45     | 95     | 44 | 36,5    | 18 - 21 | 10,5       | 50   | 114 | 223  | 43 | M8  | 232    | 282    | Ø 9,5 | Ø 9,5      | 8,5 x 10  |
| 332 - 5  | 58   | 65 | 8  | 45     | 127    | 44 | 36,5    | 18 - 21 | 10,5       | 50   | 114 | 223  | 43 | M10 | 233    | 315    | Ø 9,5 | Ø 9,5      | 8,5 x 10  |

C Ölçüsü Kısa U Kanca İçindir. Bkz. Aksesuar Sayfası. / C Dimension is for short U Hook. Please See Accessories Page.