

Quarter-Turn, RH or LH application. The Quarter-turn consists of the three basic components which can be combined to suit your application.

On request parts can be assembled

Material:




Housing: zinc die, chrome plated or black or PA, black

Insert: zinc die, chrome plated or black coated or combination of PA, black/zinc die

Screw and wave washer: steel, zinc plated

Key: zinc die

Cam: steel, zinc plated

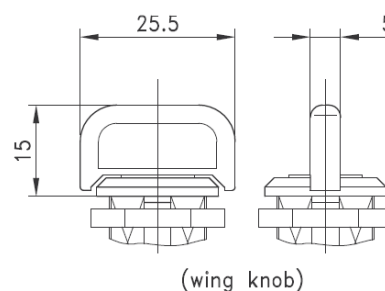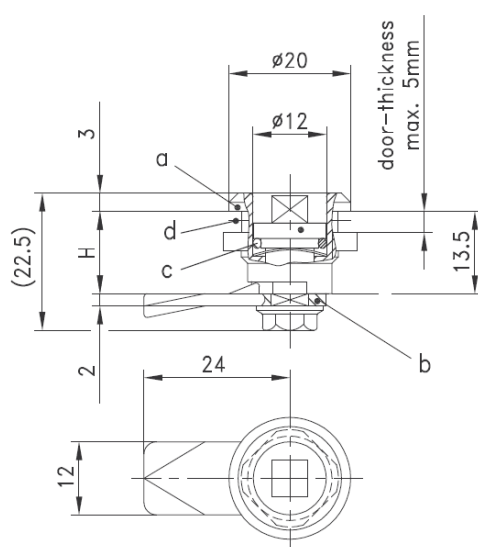

Overview of items

version	zinc die, chrome plated	zinc die, black
a) Housing and Insert with screw and wave washer		
Square 6mm	PA2213112-000	PA2213142-000
Triangular 6.5mm	PA2213113-000	PA2213143-000
Slotted 1.5mm	PA2213114-000	PA2213144-000
Wing Knob, PA black/zinc die*	-	PA2213145-000
b) Cam H in mm steel zinc plated		
7.5	PA1070075-000	
13.5	PA1070135-000	
19.5	PA1070195-000	
Special cams on request		
Optional:		
Water- and dust-tight according to IP65 by:		
c) O-Ring 9.1x1.6mm	PA1370000-000	
d) Flat external seal	PA1370010-000	