

CYLINDER QUARTER-TURN L18

For cutout 20.1, length 18

Cylinder Quarter-Turn, RH or LH application.

The Quarter-Turn consists of two basic components which can be combined to suit your application.


A pre-assembled Quarter-Turn can be installed in the cutout.

Material:

Housing: zinc die, chrome plated, Black, PA black or Stainless steel

Cam: steel, zinc plated, PA black or Stainless steel

Finger pull: PA, black

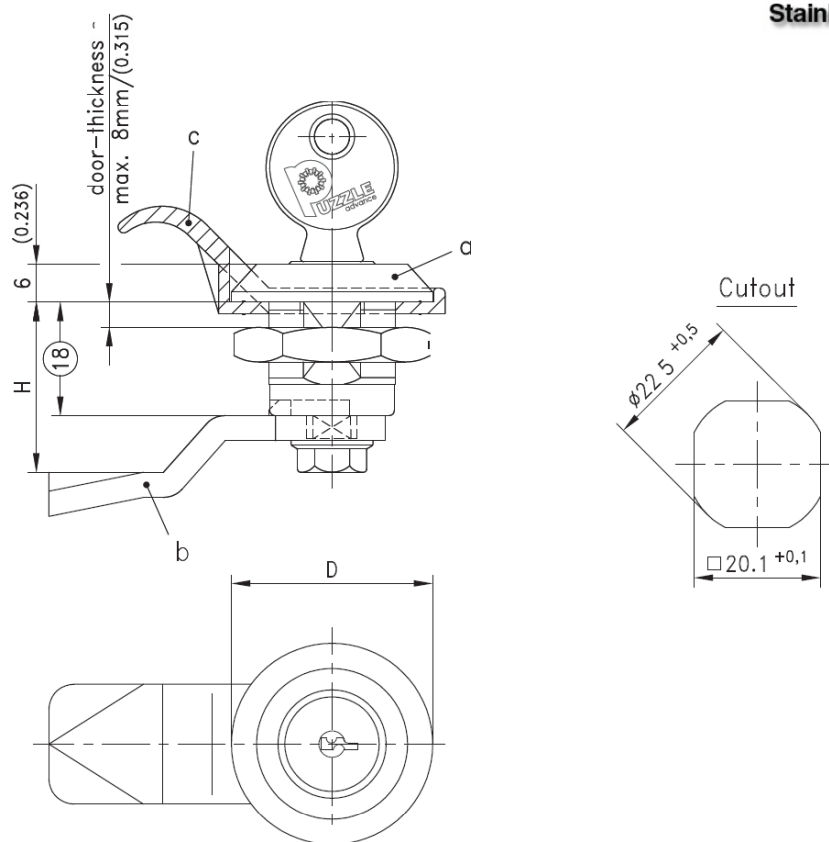

Overview of items

version	stainless steel	zinc die chrome pl.	zinc die black	Polyamide (PA6 GF30)
Housing with tumbler-barrel and single sided grounding nut				
a) Head Ø D=28mm				
Keyed alike G333	PA2204121-SST	PA2204120-000	PA2204121-000	PA2204181-000
Keyed alike G9233		PA2204122-000	PA2204123-000	PA2204183-000
Masterkey		PA2204124-000	PA2204125-000	PA2204185-000
Keyed different/mixed		PA2204126-000	PA2204127-000	PA2204187-000
b) Cam steel (zinc plated) - See cam series 5 See Page 1A-130				
c) Finger pull (PA Black)				PA1573011-000
All locks supplied with two keys.				
Water- and dust-tight according to IP65				