

HINGE 125°

Door bending 20mm, for surface mounted door

Concealed Hinge with secured hinge pin.

125° Opening angle.

RH or LH application.

Door bending variable from 18 to 20mm.



Fitting block screw on.

Material:

Frame-part and hinge pin: steel, zinc plated or Stainless steel

Weld-on roll: steel, untreated or Stainless steel

Fitting block: PA, black

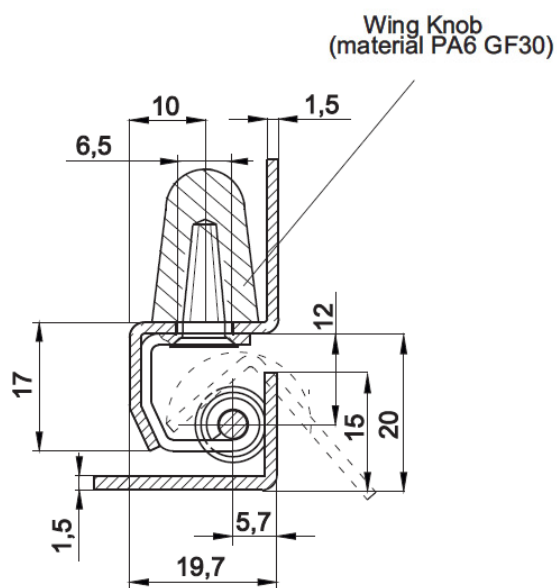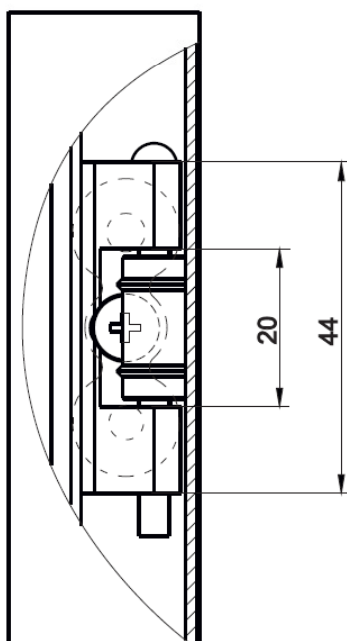

Overview of items

version	Part No.
125° Concealed Hinge	
Hinge - Steel, zinc plated	PA6410302-000
Hinge - Stainless steel	PA6410302-SST
*included in hinge-set	